

PASSIVE AND COMPACT LIQUID METAL HEAT SWITCH


[Weisensee, Patricia](#)

[Carter, Paul](#)

T-019180

Technology Description

Researchers in Patricia Weisensee's lab at Washington University have developed a compact liquid metal heat switch with a passive mechanism to control the thermal management system of spacecraft. Unlike other switch mechanisms, the liquid metal version produces high conductance ratios ($>150:1$) while remaining compact and functions within an appropriate temperature range for space travel. The addition of a bimetallic strip in the switching channel produces a fully passive mechanism without any electromagnetic components.

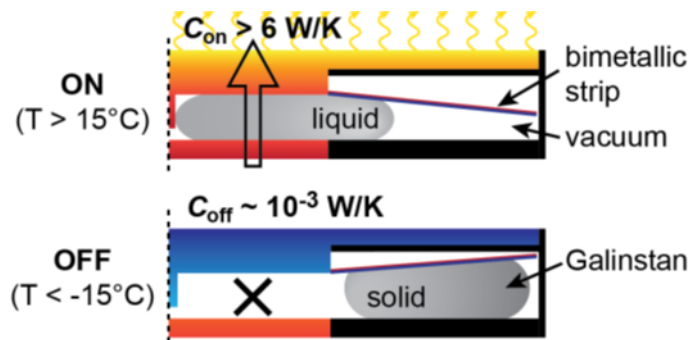

Liquid metal heat switch with a conductance ratio $> 150:1$

Heat switches are an essential part of a spacecraft's thermal management system, manipulating the flow of heat between a warm source and a cold sink. Vehicles experience extreme variations in temperature (-180 to 130°C daily on the moon), and the function of electronics, instrumentation, and humans onboard depends on the systems managing those fluctuations.

Stage of Research

The inventors have constructed and tested a proof-of-concept switch with a 9 cm channel that uses a gallium-indium-tin alloy. Ongoing work surrounds the optimization of the bimetallic strip that provides the passive actuation mechanism.

Publications

- [Passive and compact liquid metal heat switch](#). NASA, 2019.
- [Weisensee to develop heat transfer switch for NASA](#). The Source, 2019.

Applications

- Manned or unmanned spacecraft thermal management system
- Battery thermal management requiring stable temperatures

Key Advantages

- High conductance ratios of >150:1
- Does not require active input
- Compact
- Scalable at room temperature

Patents: Pending

Related Web Links: Weisensee [Profile](#) & [Lab](#)